


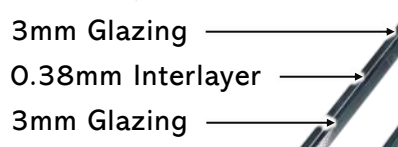
Uw 1.40		
PERFORMANCE ENERGY RATING		
Uw Thermal	1.40	
SHGC	0.53	
Rw Acoustic	37	
UV Transmission	0%	



This Certified Specification helps you compare TwinGlaze® High Performance Double Glazing to other double glazing. The lowest Uw Value achieves the highest thermal performance. TwinGlaze® delivers an Industry Best **Uw 1.40 Thermal Rating**. SHGC rates the percentage of solar radiation entering the window. **0.53 SHGC** maximises thermal performance in Summer & Winter. TwinGlaze® blocks **99.99%** of UV Radiation from entering your home.

TwinGlaze®
HIGH PERFORMANCE Double Glazing Specification

Exterior Glazing
 6.38mm Laminated Security Glass




Thermal Gap
 12mm Insulated Argon Gas Gap

Interior Glazing
 4mm Toughened Safety Glass with Low-E



TwinGlaze® includes a **Low-E** nano metallic coating to boost the energy efficiency of your double glazing. Outside infrared heat and UV radiation is reflected away in Summer, while indoor heat is reflected back into the dwelling in Winter to boost thermal performance.

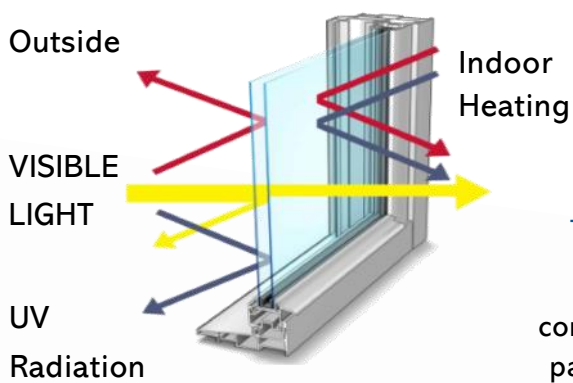

TwinGlaze® Insertion Adapter
 The Insertion Adapter is colour matched to your existing window colour to integrate TwinGlaze® Double Glazing into all existing windows and doors.

Thermal Spacer
 The spacer bar prevents condensation and keeps both panes of glass 12mm apart.



Superior Protection Against Outside Heat, Cold and Noise with added Security Benefits

Orders & Enquiries 1300 766 743
 9am-5pm Mon-Fri
www.twinglaze.com.au

VIC National Office & Manufacturing
 3 Beverage Drive TULLAMARINE VIC 3043

ACT - NSW Manufacturing
 33 Spongolite Street BEARD ACT 2620